

# OmniVLA: Physically-Grounded Multimodal VLA with Unified Multi-Sensor Perception for Robotic Manipulation

Heyu Guo<sup>1\*</sup>, Shanmu Wang<sup>2\*</sup>, Ruichun Ma<sup>3†</sup>, Shiqi Jiang<sup>3</sup>  
Yasaman Ghasempour<sup>1</sup>, Omid Abari<sup>2</sup>, Baining Guo<sup>3</sup>, Lili Qiu<sup>3</sup>

<sup>1</sup>Princeton University <sup>2</sup>University of California, Los Angeles <sup>3</sup>Microsoft Research Asia

**Abstract**—Vision-language-action (VLA) models have shown strong generalization for robotic action prediction through large-scale vision-language pretraining. However, most existing models rely solely on RGB cameras, limiting their perception and, consequently, manipulation capabilities.

We present OmniVLA, an omni-modality VLA model that integrates novel sensing modalities for physically-grounded spatial intelligence beyond RGB perception. The core of our approach is the *sensor-masked image*, a unified representation that overlays spatially grounded and physically meaningful masks onto the RGB images, derived from sensors including an infrared camera, a mmWave radar, and a microphone array. This image-native unification keeps sensor input close to RGB statistics to facilitate training, provides a uniform interface across sensor hardware, and enables data-efficient learning with lightweight per-sensor projectors. Built on this, we present a multisensory vision-language-action model architecture and train the model based on an RGB-pretrained VLA backbone. We evaluate OmniVLA on challenging real-world tasks where sensor-modality perception guides the robotic manipulation. OmniVLA achieves an average task success rate of 84%, significantly outperforms both RGB-only and raw-sensor-input baseline models by 59% and 28% respectively, meanwhile showing higher learning efficiency and stronger generalization capability.

## I. INTRODUCTION

Vision-language-action (VLA) models [1], [2] recently emerged as a powerful paradigm towards generalist policies for embodied AI. They leverage vision-language pretraining to interpret user prompts and camera observations for physical system control, including robots, autonomous vehicles, and even factories and warehouse facilities. Although showing great generalization capability and instruction following, most VLA models are limited to RGB camera image input, which constrains their perception capabilities, preventing them from handling tasks that require non-RGB cues. This undermines the potential of robots to utilize additional sensory hardware and perform challenging tasks that require perception capability similar to or even beyond humans. For example, Infrared (IR) cameras reveal temperature contrast for tasks such as search and rescue; millimeter wave (mmWave) radars penetrate occlusions, such as cardboard or clothing, with radio-frequency (RF) signals to localize hidden objects; acoustic microphone arrays enable human-like environmental awareness to ambient sound and react

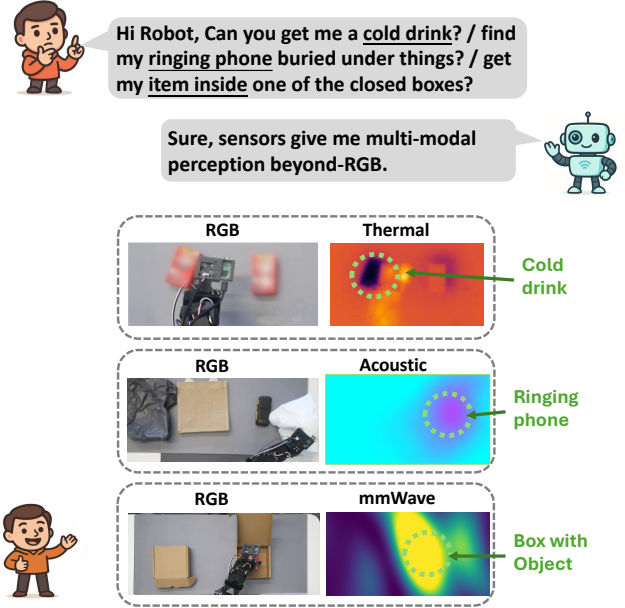


Fig. 1: Instead of relying solely on RGB cameras, OmniVLA equips embodied AI with multi-sensor perception beyond-RGB. We use beamforming to construct heatmap-like sensor images for acoustic and mmWave to highlight the sound source and the hidden item, respectively.

accordingly. Adding per-sensor encoders or simply feeding raw sensor data to VLA models, however, increases system complexity, suffers from scarce training data available, and weakens compatibility with vision-language pretraining.

In this paper, we aim to enable VLA models to perceive multi-sensor data input, utilizing various sensor modalities including infrared, mmWave, and acoustic. This enables robots to combine the strong generalization of foundation models and physical information from various sensors seamlessly to enable physically-grounded spatial intelligence.

There are several challenges in integrating diverse sensors with a VLA model. First, VLA models need to effectively interpret heterogeneous sensor information and use that to guide the action output; naively feeding or stacking raw sensor streams provides poor performance and data efficiency, as shown in Section IV, because existing VLA backbones are trained on RGB image data. Second, sensors differ in format, field of view, and resolution, calling for a scalable, uniform representation rather than training sensor fusion models that

\*Co-primary authors; work completed during internships at Microsoft Research Asia.

†Corresponding author (ruichunma@microsoft.com).

depend on specific hardware. Lastly, sensor modality data are much more scarce compared to web-scale image-text data pairs, so we require a data-efficient approach for training. To solve these challenges, we take inspiration from how the human brain interprets sensor information: as we are used to RGB images, we naturally anchor other sensor cues to the RGB view—for example, interpreting infrared camera images by associating temperatures with objects visible in the image.

We present **OmniVLA**, the first multisensory VLA that integrates novel sensing modalities to enable beyond-RGB robotic perception and manipulation by unifying heterogeneous sensors into an image-native space. The core of our design is an intermediate representation, *sensor-masked images*, which is produced by semantically segmenting the RGB image and overlaying the relevant sensor information as colored masks. Such representation makes sure sensor information is spatially grounded and semantically aligned with the RGB image to ease the integration with VLA models. This brings several benefits that solve the challenges above: (i) making sensor information spatially grounded in RGB pixel coordinates to facilitate robotic manipulation on target objects, (ii) remaining close to RGB statistics so existing vision encoders and VLA backbones can be reused for further training, (iii) providing a uniform representation across sensors, resolutions, and hardware variants.

Built on the sensor-masked images, we propose a tailored VLA model architecture (Figure 2). We first convert all raw sensor measurements to image-like 2D spatial representations. Specifically, we perform beamforming for mmWave radar and acoustic array data to acquire heatmap-like raw sensor images. Then, to generate masks for interested objects in the scene, we use a cloud-based Vision-Language Model (VLM) to interpret the task request and generate a prompt for grounded SAM to provide semantic-based segmentation masks [3]. Note that the VLM is only invoked once per task, so its delay does not affect the real-time robot actions. We further overlay sensor information on the RGB images in masked regions to acquire the sensor-masked images as the input to the frozen vision encoder. After the vision encoder, we add lightweight projection layers for each sensor to generate better-aligned tokens for sensor images. Finally, the input tokens are processed by an LLM, which provides tokens to the action expert for the robot action output.

We build a multi-sensor robot arm prototype to collect RGB camera data together with various sensor data, paired with expert demonstrations, and train OmniVLA with the collected datasets. We evaluate OmniVLA extensively with several manipulation tasks that require sensor-modality guidance, including thermal-based pick-and-place, mmWave-based see-through boxes and opening the non-empty one, and acoustic-based uncovering a ringing phone beneath clothes. OmniVLA achieves an average task success rate of 84%, significantly outperforms 25% success rate of RGB-only baseline and 56% success rate of raw-sensor-input baseline. This shows the benefit from our unique sensing capabilities and the performance gain from our sensor-masked image

representation. We also highlight the data efficiency of our approach by achieving a similar success rate with only 50% training data compared to the raw-sensor-input baseline. Moreover, we show that our approach provides strong generalization capability across three unseen tasks, outperforming the base VLA model and raw-sensor-data-based model by 59% and 28% respectively on average success rate.

To summarize, we make the following contributions:

- 1) To our knowledge, OmniVLA is the first VLA model that unifies multiple sensing modalities, including infrared, mmWave, and acoustic, to enable robotic manipulation tasks that exceed RGB-based perception capability.
- 2) We introduce *sensor-masked images*, a spatially grounded and semantically aligned representation that allows the reuse of a pre-trained vision encoder, provides a uniform representation across sensor hardware, and improves task learning efficiency.
- 3) We present a lightweight OmniVLA model architecture and evaluate system model performance with extensive experimental evaluation.

## II. RELATED WORK

### A. Vision-Language-Action Models

Vision-language-action (VLA) models have been a popular research paradigm for robotic manipulation, using the language prompt and video feed as input and generating robot actions in an end-to-end manner. Conventional robotic manipulation policies using reinforcement learning and simulators provide great performance on specific tasks [4]–[10], while VLA models have shown great improvement in few-shot task generalization and instruction following by leveraging web-scale pretraining. The majority of VLA models only take video from RGB cameras as visual input [1], [2], [11]–[14]. However, these works are inherently limited by the RGB camera input and are unable to finish tasks that require perception capabilities beyond RGB.

To address this issue, researchers propose novel Vision-Language-Action models with additional sensor input. Depth information is widely employed to enhance the capability of Vision-Language-Action models with better spatial-temporal understanding [15]–[19]. Other works incorporate tactile perception in Vision-Language-Action models for better task planning, grounding, and reasoning capabilities [20], [21]. Moreover, Vlas [22] integrates speech information into Vision-Language-Action models for convenient and personalized human-robot interaction. MultiPLY [23] introduces an embodied LLM for planning multisensory interactions with the environment, but it is based on simulator only and cannot perform detailed action control.

Prior work has not explored the integration of novel sensing modalities like thermal, mmWave, and acoustic, which provide unique sensing information for manipulation tasks. Also, existing approaches often require training sensor encoders for each modality, which need a large amount of data. In contrast, we propose a data-efficient approach

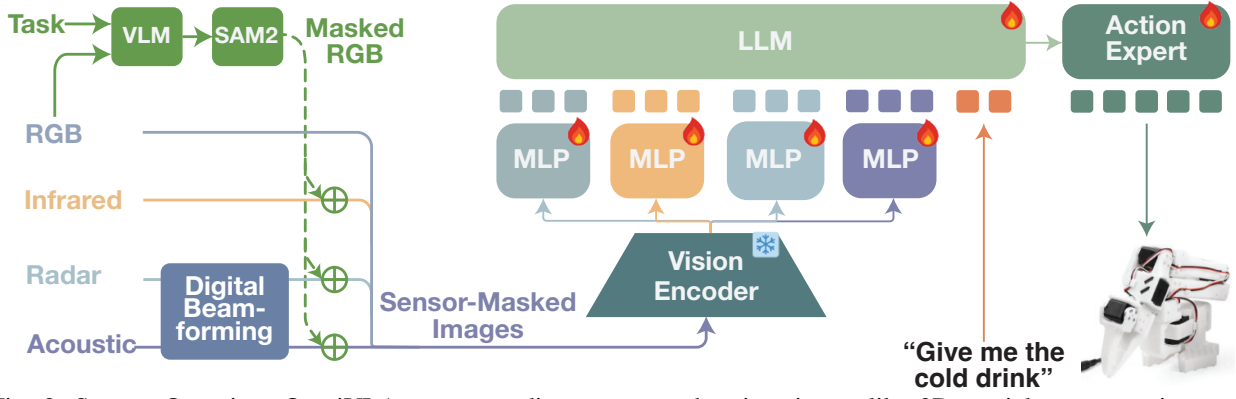


Fig. 2: System Overview. OmniVLA processes diverse sensor data into image-like 2D spatial representations, overlaying sensor information on top of RGB images to acquire spatially grounded and semantically aligned *masked-sensor images*. We train a VLA model with individual MLP sensor projectors to achieve challenging tasks requiring beyond-RGB perception.

towards beyond-RGB perception. Moreover, previous works propose complex and specific model architectures for extra sensor and image fusion, which are not generalizable to diverse sensors. In contrast, we propose Sensor-Masked Image, a simple and unified sensor fusion strategy for Vision-Language-Action models.

### B. Multi-sensor Fusion based Perception

Multi-sensor fusion based perception has received significant interest recently, especially for 3D detection and other downstream tasks for autonomous driving. The benefits for multi-sensor fusion are comprehensive environmental understanding for complementary sensors [24]. One typical type of multi-sensor fusion is mmWave radar and camera sensor fusion, widely used in autonomous driving because of its reliability in rainy and foggy environments [25]–[31]. Another thread of recent work fuses RF signals for robotic perception to achieve non-line-of-sight object finding [32]–[34], but it requires extra RFID tags attached to the objects and is specifically designed for RF signals.

Prior works focus on environmental perception tasks like 3D object detection, semantic scene understanding tasks [35], [36], while we aim for robot manipulation by generating actions. These prior works also heavily rely on model architectures tailored for domain-specific downstream tasks with specific sensors, unable to provide strong generalization or instruction following of VLA models. Moreover, OmniVLA provides a general framework for more diverse sensors.

## III. SYSTEM DESIGN

### A. System Overview

OmniVLA contains two parts: sensor-masked image generation and multi-sensor vision-language-action model architecture. The first part first extracts raw sensor data, then preprocesses it into 2D sensor images/heatmaps. After that, we use a semantic-based segmentation model to generate the masks from the RGB images following a VLM-generated prompt. Then we overlay the sensor images on the masked regions of RGB images to output sensor-masked images,

which are the input for our multi-sensor vision-language-action model. The second part is a multi-sensor vision-language-action model backbone that is designed for sensor-masked images to capture each sensor’s input and avoid requiring a large amount of sensor data for training. We utilize the existing frozen vision encoders to encode sensor-masked images. For each sensor modality, we use individual multi-layer perceptron layers to align sensor image tokens with language and RGB image tokens. The tokens are concatenated together with language tokens as input for the large language model in the architecture, and then we generate the final action predictions using the action expert module.

### B. Sensor Data Representation

The first part of our work is sensor-masked image generation, which includes sensor data preprocessing, segmentation mask processing, sensor-masked image blending.

**Preprocessing.** We convert all raw measurements into a *camera-like 2D spatial representation*. Thermal camera already outputs raster images—infrared intensity—defined over image coordinates  $(u, v)$ . In contrast, the mmWave radar and the microphone array provide complex signal samples per array element,  $x_{i,k} = A_{i,k}e^{j\psi_{i,k}}$  for the  $k$ -th element of array  $i$ , where  $i \in \{\text{mmWave radar, microphone array}\}$ . To obtain inputs with *consistent spatial mapping* (horizontal and vertical viewing axes on a 2D grid), we compute azimuth–elevation heatmaps via conventional delay-and-sum beamforming [37]:

$$I_i(\theta, \phi) = 20 \log_{10} \left\| \sum_{k=1}^K A_{i,k} e^{j\psi_{i,k}} e^{-j\Phi_{i,k}} \right\|, \quad (1)$$

$$\Phi_{i,k} = \frac{2\pi}{\lambda_i} (x_{i,k} \cos \phi \sin \theta + y_{i,k} \sin \phi).$$

where  $\theta$  is the azimuth angle,  $\phi$  is the elevation angle,  $\lambda_i$  is the wavelength received by  $i^{th}$  array element (antenna or microphone),  $(x_{i,k}, y_{i,k})$  is the position for  $k^{th}$  array element in array  $i$ . One example is shown in Fig. 1. Similar to the principle of RGB camera, the azimuth-elevation heatmap

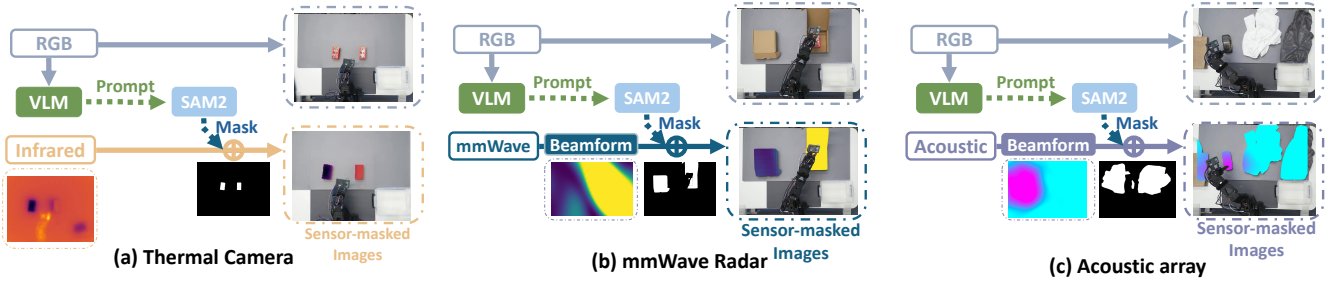


Fig. 3: Sensor Data Processing Illustration. We propose a general sensor data processing pipeline applicable to various sensors, including (a) thermal camera, (b) mmWave radar, and (b) acoustic microphone array, by overlaying sensor information on top of RGB images as VLA model input. We update prompt input to SAM2 model when the task begins and then asynchronously check for updates, so that VLM output delay does not affect the real-time processing of sensor-masked images.

reveals the environmental information in a direct way for human understanding and acts as the sensor images in the following steps.

**Segmentation and overlay.** The next step is generating segmentation masks from the task description and RGB images. We first send the task request text and RGB image to the state-of-the-art vision-language models, GPT-4o [38], to generate the segmentation prompts that describe objects related to the task in the current scene, for example, ‘red block/drink’, ‘black phone’, ‘cardboard boxes’. We update the prompt when the task begins and then asynchronously check for updates, so that VLM output delay does not affect real-time robot manipulation actions. Then we input the segmentation prompts and RGB image into a segmentation model to generate image masks for task-related objects. Specifically, we use Grounded SAM 2 [3], which combines segment anything model [39] and open-set object detection model, grounding DINO [40]. The final output is a 0-1 matrix, where ‘1’ labels the masked regions for objects. The second step can be expressed as the following equations

$$\begin{aligned} l &= \text{VLM}(T_{\text{task}}, I_{\text{RGB}}), \\ \text{mask} &= \text{SAM2}(l, I_{\text{RGB}}) \end{aligned} \quad (2)$$

where  $l$  represents the segmentation prompt generated by VLM,  $T_{\text{task}}$  is the input task description, and  $I_{\text{RGB}}$  is the RGB image. The final step is blending sensor images and RGB images to generate sensor-masked images. We perform one-time calibration between the sensors and RGB cameras by rotation and clipping to ensure they are spatially aligned. Note that some inaccuracy is tolerable as we don’t require a precise match. Then, we segment the specific part of sensor images we are interested in by masks in the previous step. Finally, we blend parts of sensor images with RGB images for the final sensor-masked images. The process of the final step is shown in Eq.(3),

$$\begin{aligned} I_i^c &= \text{Calibration}(I_i), \\ I_i^m &= \text{mask} \odot (\alpha I_i^c + (1 - \alpha) I_{\text{RGB}}) \\ &\quad + (1 - \text{mask}) \odot I_{\text{RGB}} \end{aligned} \quad (3)$$

where  $i \in \{\text{mmWave radar, microphone array, thermal camera}\}$  and  $\alpha$  is the hyper-parameter for image blending. The higher

$\alpha$  is, the more sensor information remains for comprehensive understanding, but less correlation between the masked part and the unmasked RGB image can be learned from the model. We set  $\alpha$  as 1 by default based on our empirical testing. Final sensor-masked images act as input for our multi-sensor Vision-Language-Action model for the second part.

### C. Model architecture and training

The second part of our work is a multi-sensor vision-language-action model for sensor-masked images, which contains the architecture design and training strategy.

In recent Vision-Language-Action model, it first encodes the input RGB images with vision encoder, then projects encoded results with multi-layer perceptron (MLP) layers for image tokens. The image tokens are concatenated with language tokens as input for large language models to further generate actions to manipulate the robot, which we follow to design our architecture.

We present a generalizable and efficient multi-sensory VLA model architecture design as shown in Fig. 2. We enable effective sensor data understanding by feeding sensor-masked images to an existing vision encoder. Then for each sensor modality, we input the encoded results into individual multi-layer perceptron modules for projection to align with the language tokens. The projected tokens for each sensor are concatenated together with language tokens from the task description passing the language encoder. Finally, a large language model takes concatenated tokens as input, then provides tokens or features to a diffusion-based action expert for final robotic action generation. As we focus on integrating sensor information with VLA models for multi-sensory perception, we follow typical model architectures for the action generation, such as SmolVLA [2], pi0 [1]. Our approach is potentially compatible with other VLA models as well due to its image-like sensor data representation.

The overall data flow can be described with the following equations

$$\begin{aligned} t_i &= \text{MLP}_i(E_I(I_i^m)), \\ t_{\text{task}} &= E_L(T_{\text{task}}), \\ \text{action} &= \text{VLA}([t_1, t_2, \dots, t_m, t_{\text{task}}]) \end{aligned} \quad (4)$$



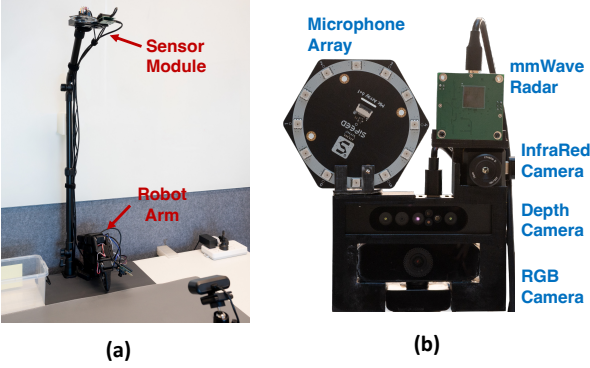


Fig. 4: Hardware Implementation. (a) robot arm and sensor setup (b) sensor module, integrating multiple sensors and cameras.

where  $m$  is the number of sensors we use,  $E_I$  is the image encoder, and  $E_L$  is the language embedding layer,  $t_i$  is the embedding of  $i$ th sensor image. We underline that our architecture does not require all sensors shown here. Instead, we allow flexible sensor setup according to the deployment scenario, budget, etc., for example using a single sensor like an infrared camera. This design is a general and flexible framework to process beyond-RGB sensor-masked images, compatible with existing Vision-Language-Action models. It means we can utilize the vision-language capability in existing model’s pretraining and understand unique features from each sensor easily with a few demonstration data.

During the model training, we freeze the vision and language encoders, typical in various Vision-Language-Action models [1], [2], [41] and Vision-Language models finetuning [42], [43]. Meanwhile, we set all other weights trainable for multi-sensor perception in robotic manipulation. We initialize individual MLP projectors with weights from the RGB projection layer in existing Vision-Language-Action models, which provides a basic understanding of images and allows updating for new sensor image features. We co-finetune MLP modules for each sensor and the rest unfrozen weights of the model using the demonstration dataset.

#### IV. EVALUATION

We evaluate OmniVLA with a real-world prototype across several sensor-related manipulation tasks. First, we show OmniVLA’s unique beyond-RGB perception capabilities, using daily tasks that require non-visible cues, including thermal-based pick-and-place, see-through and open the box with an object inside, and uncovering ringing items. OmniVLA significantly outperforms RGB-only VLA models and VLA models trained with unprocessed sensor images. We also highlight the data efficiency of our approach. Second, we show that our approach provides superior generalization capability for sensor-related tasks, outperforming baseline approaches.

##### A. Experimental Setup

**Implementation.** Our prototype includes a SO101 manipulator arm [44] with a standard top-down RGB camera, a front

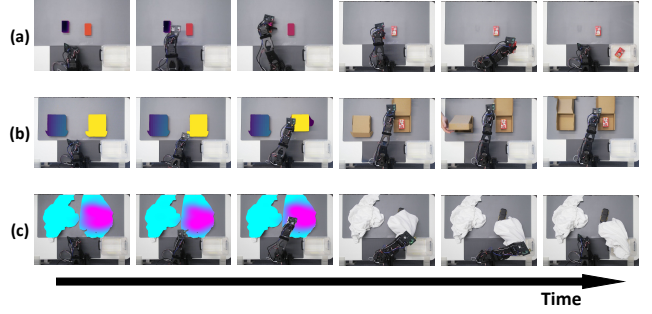


Fig. 5: Examples of Robotic Manipulation Task Completion over Time. (a) Thermal: finding the cold drink. (b) mmWave: opening the box with object inside. (c) Acoustic: uncovering the ringing phone. The first three images are sensor-masked images; the rest images are raw RGB images for visibility.

camera, and an arm camera, augmented by our multi-modal sensor suite comprising: a depth camera, an infrared thermal camera, an mmWave radar sensor, and a six-microphone circular array (Figure 4). While the RGB camera provides standard visual perception, our additional sensor modalities capture unique physical information that extends perception capability significantly.

**Model training and inference.** We use SmolVLA [2] as the base model by default to implement our design and use the pre-trained weights. We expect our approach to be compatible with most existing RGB-only VLA models. We use multiple Nvidia A100 GPUs on a server for distributed training and use a local RTX 4090 GPU for model inference during system evaluation and inference. For real-time inference, we load both the VLA model and segmentation model on the local RTX 4090 machine, which is able to output 15 predictions per second for end-to-end action prediction. We expect to have lower delays with code implementation optimization. Note that the VLM model for the segmentation prompt is invoked only once per task to avoid action prediction delay.

**Task setting.** We evaluate OmniVLA on three types of manipulation tasks that need to leverage non-visual sensory modalities: (1) *Thermal modality*: Distinguishing between a cold and warm drink, picking up the cold drink and placing it into a plastic container; (2) *mmWave modality*: Seeing through enclosed cardboard/foam (non-metal) boxes with mmWave radar, opening one of the boxes with an object inside and exposing the target object. (3) *Acoustic modality*: Locating a ringing mobile phone concealed beneath opaque coverings using spatial audio cues from the microphone array, and removing the covering to uncover the phone. We show examples of successful action trajectories from OmniVLA in Figure 5.

**Evaluation metrics and baselines.** We evaluate model performance using task success rates computed over 25 independent trials per task, complemented by task scores: 0.5 score for choosing the right item to interact with, 0.5 score for performing the correct manipulation, e.g., picking up and placing in the container, opening up the box, removing the

	Success Rate				Task Score			
	Thermal	mmWave	Acoustic	Average	Thermal	mmWave	Acoustic	Average
VLA-RGB	28%	8%	40%	25%	0.62	0.34	0.70	0.55
VLA-RAW	52%	68%	48%	56%	0.74	0.84	0.62	0.73
<b>OmniVLA</b>	<b>80%</b>	<b>84%</b>	<b>88%</b>	<b>84%</b>	<b>0.91</b>	<b>0.88</b>	<b>0.92</b>	<b>0.90</b>

TABLE I: Success rates and task scores across three types of sensor-modality tasks.

	Success Rate				Task Score			
	Thermal	mmWave	Acoustic	Average	Thermal	mmWave	Acoustic	Average
SmolVLA	80%	84%	88%	84%	0.91	0.88	0.92	0.90
Pi0	68%	60%	64%	64%	0.84	0.72	0.82	0.80

TABLE II: Model comparisons evaluated across three types of sensor tasks.

	Thermal		mmWave		Acoustic	
	Stage 1	Stage 2	Stage 1	Stage 2	Stage 1	Stage 2
VLA-Base	<b>100%</b>	24%	56%	40%	76%	16%
Pretrained VLA-RAW	76%	84%	52%	76%	60%	<b>92%</b>
<b>Pretrained OmniVLA</b>	<b>100%</b>	<b>92%</b>	<b>92%</b>	<b>80%</b>	<b>92%</b>	<b>92%</b>
Gains	+0%/+24%	+68%/+8%	+36%/+40%	+40%/+4%	+16%/+32%	+76%/+0%

TABLE III: Pretraining effectiveness by comparing per-stage success rates (%). Gains are absolute improvements over two baselines.

coverings. For baselines, we compare our approach against (1) **VLA-RGB**: VLA models with standard RGB input only for training and inference, (2) **VLA-RAW**: VLA models with raw sensor data/images input for training and inference. It uses the same model architecture as OmniVLA, but skips the segmentation and overlay step for the sensor data processing. Note that we still apply beamforming for VLA-RAW model mmWave and acoustic sensor input to have a strong baseline.

### B. Multi-sensory Task Performance

We first evaluate OmniVLA performance on manipulation tasks compared with the baselines. Then we evaluate the performance over different foundational robotic models. Finally, we explore the impact of finetuning data amount on the final performance.

**Overall Performance.** We evaluate OmniVLA after training on 100 expert demonstration episodes of thermal and acoustic modality tasks and 200 episodes of mmWave modality task individually. mmWave task requires more training data because opening a box is more difficult to learn compared to typical pick-and-place type of actions, which seldom appears in current VLA model pretraining dataset. For each demonstration, we randomize objects' positions on a table within the robot's workspace. As SmolVLA pretraining dataset does not include any non-RGB sensor, we consider the number of episodes are reasonable and shows high learning efficiency of our approach. Table I shows success rates and task scores across tasks. OmniVLA finishes the tasks requiring extra sensors successfully at a high rate of 84% on average. OmniVLA consistently outperforms all baseline configurations across the three tasks, demonstrating the effectiveness of our unified multi-sensory perception

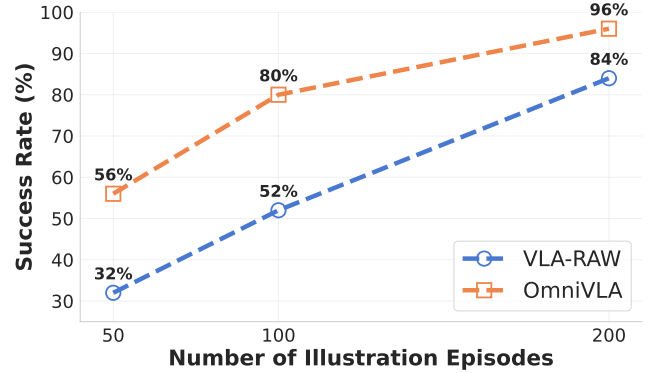


Fig. 6: Success rates over number of demonstration episodes.

approach. On average, we outperforms VLA-RGB model and VLA-RAW model by 59% and 28% in success rate, respectively. OmniVLA also improves the task score by 0.45 and 0.17, respectively. This shows sensor-modalities effectively provided new capabilities for the VLA model and our sensor-masked image representation significantly boosts performance.

**Comparing base models.** We apply our approach to Pi0 [1] and compare the performance across 3 tasks. Table II shows that both models work, while smolVLA provides better performance. This is likely due to smolVLA is pre-trained with lerobot robot arm dataset. Overall, this shows OmniVLA's potential for combining with various current VLA models to provide extra new sensor-modality capabilities without starting from scratch.

**Learning efficiency.** We quantitatively compare the learning efficiency of using sensor-masked images and raw sensor

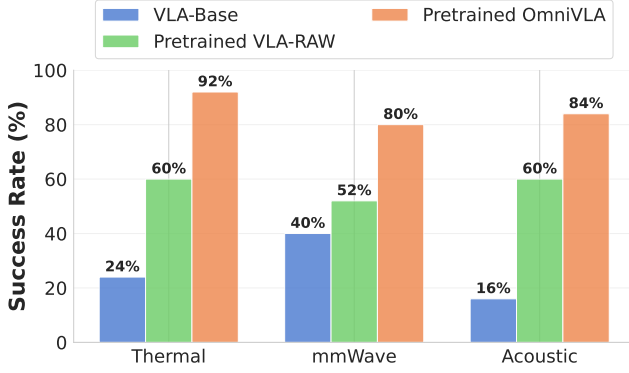


Fig. 7: Success rates when adapting to unseen tasks. We compare the pretrained OmniVLA model with two baselines, VLA-Base: no pretraining, Pretrained VLA-RAW: pretrained with raw sensor images.

data (no overlaying on RGB images), by training with an increasing number of thermal task episodes. As shown in Figure 6, OmniVLA constantly outperforms VLA-RAW model, achieving a similar success rate with only around 50% of the training episodes. This shows the data efficiency of our proposed sensor-masked image representation, which significantly reduces the required finetuning data amount compared with raw sensor images.

### C. Generalization Performance

Lastly, we evaluate how well our architecture can generalize to unseen tasks by pre-training on a mixed multi-sensory training dataset.

**Multi-sensory pretraining.** We construct a pretraining corpus of 800 demonstration episodes: 200 episodes for each of three sensor-modality tasks (a total of 600) and 200 episodes for generic pick-and-place with everyday objects.

We pre-train our OmniVLA model with the mixed dataset, then test the performance after performing few-shot learning with only 25 demonstration episodes of performing unseen tasks (matching common RGB-only VLA testing practice). We induce distribution shifts in object identity and materials on the basis of tasks shown in Figure 5): (1) swap the drink type, (2) replace cardboard with foam boxes, and (3) substitute T-shirts with towels. The object locations are randomized within the feasible workspace of the robot arm and towels are randomly folded.

**Baselines.** To show the effectiveness, we implement two baselines: (1) **VLA-Base** — no multi-sensory pretraining, using the same OmniVLA model architecture with RGB-only model (SmolVLA) as backbone weights, finetuned on the 25 demonstrations. (2) **Pretrained VLA-RAW** — OmniVLA model pretrained on the same 800 episodes but feed raw sensor heatmaps/images directly (no segmentation/overlay), then perform the same 25-shot adaptation. Our method, OmniVLA, uses the identical pretraining and few-shot protocols but with sensor-masked images as input. To compare different methods in more detail, we decompose each task into two stages: **Stage 1** (select the correct target to interact

with) and **Stage 2** (complete the subsequent manipulation). We report stage-wise success rates and scores (Table III), and overall task successful rate (Figure 7).

As shown in Table III, OmniVLA shows substantially better generalization to unseen sensor-modality tasks than both baselines. In Stage 1, OmniVLA improves success rates by 17% over VLA-Base and by 32% over Pretrained VLA-RAW on average. In Stage 2, OmniVLA yields gains of up to 76%. These results suggest two complementary effects: (i) the sensor-masked overlay makes sensor cues spatially aligned with RGB, which simplifies learning the selection policy (Stage 1); and (ii) large-scale multi-sensory pretraining supplies transferable manipulation priors that boost few-shot control (Stage 2). Consequently, few-shot task success rate increases by 59% over VLA-Base and 28% over Pretrained VLA-RAW on average, and up to 68% across the three unseen tasks, as shown in Figure 7. To conclude, both sensor-masked images and pretraining significantly improve the success rate on unseen tasks with a few episodes of finetuning, showing powerful generalization capability.

## V. CONCLUSION

We introduce OmniVLA, a multi-modal vision-language-action model that equips embodied AI systems with perception capabilities beyond the visible spectrum by integrating sensors, i.e., infrared, mmWave, and acoustic sensors. Our core design is the sensor-masked image, a unified representation that spatially grounds and semantically aligns diverse sensor data onto RGB images. This image-native approach allows reusing pretrained vision encoder, enabling data-efficient learning with lightweight per-sensor projection layers. Through extensive real-world experiments, we demonstrated that OmniVLA significantly outperforms baseline models on challenging manipulation tasks, showing an average success rate of **84%**, exceeding the 25% of an RGB-only VLA and the 56% of a model trained on unprocessed sensor data. OmniVLA is a step towards creating more versatile and perceptive embodied AI that can fully understand and interact with their physical surroundings.

## REFERENCES

- [1] K. Black, N. Brown, D. Driess, A. Esmail, M. Equi, C. Finn, N. Fusai, L. Groom, K. Hausman, B. Ichter, S. Jakubczak, T. Jones, L. Ke, S. Levine, A. Li-Bell, M. Mothukuri, S. Nair, K. Pertsch, L. X. Shi, J. Tanner, Q. Vuong, A. Walling, H. Wang, and U. Zhilinsky, “ $\pi_0$ : A vision-language-action flow model for general robot control,” 2024. [Online]. Available: <https://arxiv.org/abs/2410.24164>
- [2] M. Shukor, D. Aubakirova, F. Capuano, P. Kooijmans, S. Palma, A. Zouitine, M. Aractingi, C. Pascal, M. Russi, A. Marafioti *et al.*, “Smolvla: A vision-language-action model for affordable and efficient robotics,” *arXiv preprint arXiv:2506.01844*, 2025.
- [3] T. Ren, S. Liu, A. Zeng, J. Lin, K. Li, H. Cao, J. Chen, X. Huang, Y. Chen, F. Yan *et al.*, “Grounded sam: Assembling open-world models for diverse visual tasks,” *arXiv preprint arXiv:2401.14159*, 2024.
- [4] Y. Chebotar, Q. Vuong, K. Hausman, F. Xia, Y. Lu, A. Irpan, A. Kumar, T. Yu, A. Herzog, K. Pertsch *et al.*, “Q-transformer: Scalable offline reinforcement learning via autoregressive q-functions,” in *Conference on Robot Learning*. PMLR, 2023, pp. 3909–3928.
- [5] J. Luo, P. Dong, J. Wu, A. Kumar, X. Geng, and S. Levine, “Action-quantized offline reinforcement learning for robotic skill learning,” in *Conference on Robot Learning*. PMLR, 2023, pp. 1348–1361.

- [6] G. Li, D. Tian, H. Zhou, X. Jiang, R. Lioutikov, and G. Neumann, "Top-erl: Transformer-based off-policy episodic reinforcement learning," *arXiv preprint arXiv:2410.09536*, 2024.
- [7] C. Ying, H. Zhongkai, X. Zhou, X. Xu, H. Su, X. Zhang, and J. Zhu, "Peac: Unsupervised pre-training for cross-embodiment reinforcement learning," *Advances in Neural Information Processing Systems*, vol. 37, pp. 54 632–54 669, 2024.
- [8] A. Kumar, A. Singh, S. Tian, C. Finn, and S. Levine, "A workflow for offline model-free robotic reinforcement learning," *arXiv preprint arXiv:2109.10813*, 2021.
- [9] Y. Chebotar, K. Hausman, Y. Lu, T. Xiao, D. Kalashnikov, J. Varley, A. Irpan, B. Eysenbach, R. Julian, C. Finn *et al.*, "Actionable models: Unsupervised offline reinforcement learning of robotic skills," *arXiv preprint arXiv:2104.07749*, 2021.
- [10] A. Kumar, A. Singh, F. Ebert, M. Nakamoto, Y. Yang, C. Finn, and S. Levine, "Pre-training for robots: Offline rl enables learning new tasks from a handful of trials," *arXiv preprint arXiv:2210.05178*, 2022.
- [11] O. Mees, D. Ghosh, K. Pertsch, K. Black, H. R. Walke, S. Dasari, J. Hejna, T. Kreiman, C. Xu, J. Luo *et al.*, "Octo: An open-source generalist robot policy," in *First Workshop on Vision-Language Models for Navigation and Manipulation at ICRA 2024*, 2024.
- [12] M. J. Kim, K. Pertsch, S. Karamcheti, T. Xiao, A. Balakrishna, S. Nair, R. Rafailov, C. Foster, G. Lam, P. Sanketi *et al.*, "Openvla: An open-source vision-language-action model," *arXiv preprint arXiv:2406.09246*, 2024.
- [13] J. Wen, Y. Zhu, J. Li, Z. Tang, C. Shen, and F. Feng, "Dexvla: Vision-language model with plug-in diffusion expert for general robot control," *arXiv preprint arXiv:2502.05855*, 2025.
- [14] Y. Ze, Z. Chen, W. Wang, T. Chen, X. He, Y. Yuan, X. B. Peng, and J. Wu, "Generalizable humanoid manipulation with 3d diffusion policies," *arXiv preprint arXiv:2410.10803*, 2024.
- [15] C. Li, J. Wen, Y. Peng, Y. Peng, F. Feng, and Y. Zhu, "Pointvla: Injecting the 3d world into vision-language-action models," *arXiv preprint arXiv:2503.07511*, 2025.
- [16] V. Bhat, Y.-H. Lan, P. Krishnamurthy, R. Karri, and F. Khorrami, "3d cavla: Leveraging depth and 3d context to generalize vision language action models for unseen tasks," *arXiv preprint arXiv:2505.05800*, 2025.
- [17] D. Qu, H. Song, Q. Chen, Y. Yao, X. Ye, Y. Ding, Z. Wang, J. Gu, B. Zhao, D. Wang *et al.*, "Spatialvla: Exploring spatial representations for visual-language-action model," *arXiv preprint arXiv:2501.15830*, 2025.
- [18] M. A. Patratskiy, A. K. Kovalev, and A. I. Panov, "Spatial traces: Enhancing vla models with spatial-temporal understanding," *arXiv preprint arXiv:2508.09032*, 2025.
- [19] H. Zhen, X. Qiu, P. Chen, J. Yang, X. Yan, Y. Du, Y. Hong, and C. Gan, "3d-vla: A 3d vision-language-action generative world model," *arXiv preprint arXiv:2403.09631*, 2024.
- [20] J. Bi, K. Y. Ma, C. Hao, M. Z. Shou, and H. Soh, "Vla-touch: Enhancing vision-language-action models with dual-level tactile feedback," *arXiv preprint arXiv:2507.17294*, 2025.
- [21] J. Huang, S. Wang, F. Lin, Y. Hu, C. Wen, and Y. Gao, "Tactilevla: Unlocking vision-language-action model's physical knowledge for tactile generalization," *arXiv preprint arXiv:2507.09160*, 2025.
- [22] W. Zhao, P. Ding, M. Zhang, Z. Gong, S. Bai, H. Zhao, and D. Wang, "Vlas: Vision-language-action model with speech instructions for customized robot manipulation," *arXiv preprint arXiv:2502.13508*, 2025.
- [23] Y. Hong, Z. Zheng, P. Chen, Y. Wang, J. Li, and C. Gan, "Multiply: A multisensory object-centric embodied large language model in 3d world," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024, pp. 26 406–26 416.
- [24] Z. Liu, H. Tang, A. Amini, X. Yang, H. Mao, D. Rus, and S. Han, "Bevfusion: Multi-task multi-sensor fusion with unified bird's-eye view representation," *arXiv preprint arXiv:2205.13542*, 2022.
- [25] P. Wolters, J. Gilg, T. Tepe, F. Herzog, A. Laouichi, M. Hofmann, and G. Rigoll, "Unleashing hydra: Hybrid fusion, depth consistency and radar for unified 3d perception," *arXiv preprint arXiv:2403.07746*, 2024.
- [26] Z. Lin, Z. Liu, Z. Xia, X. Wang, Y. Wang, S. Qi, Y. Dong, N. Dong, L. Zhang, and C. Zhu, "Rcbevdet: Radar-camera fusion in bird's eye view for 3d object detection," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2024, pp. 14 928–14 937.
- [27] L. Zheng, J. Liu, R. Guan, L. Yang, S. Lu, Y. Li, X. Bai, J. Bai, Z. Ma, H.-L. Shen *et al.*, "Doracamom: Joint 3d detection and occupancy prediction with multi-view 4d radars and cameras for omnidirectional perception," *arXiv preprint arXiv:2501.15394*, 2025.
- [28] E. Palladin, R. Dietze, P. Narayanan, M. Bijelic, and F. Heide, "Samfusion: Sensor-adaptive multimodal fusion for 3d object detection in adverse weather," in *European Conference on Computer Vision*. Springer, 2024, pp. 484–503.
- [29] Y. Li, Y. Yang, and Z. Lei, "Rctrans: Radar-camera transformer via radar densifier and sequential decoder for 3d object detection," in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 39, no. 5, 2025, pp. 5048–5056.
- [30] J. Kim, M. Seong, and J. W. Choi, "Crt-fusion: Camera, radar, temporal fusion using motion information for 3d object detection," *Advances in Neural Information Processing Systems*, vol. 37, pp. 108 625–108 648, 2024.
- [31] W. Xiong, Z. Zou, Q. Zhao, F. He, and B. Zhu, "Lxlv2: Enhanced lidar excluded lean 3d object detection with fusion of 4d radar and camera," *IEEE Robotics and Automation Letters*, 2025.
- [32] T. Boroushaki, I. Perper, M. Nachin, A. Rodriguez, and F. Adib, "Rfusion: Robotic grasping via rf-visual sensing and learning," in *Proceedings of the 19th ACM conference on embedded networked sensor systems*, 2021, pp. 192–205.
- [33] T. Boroushaki, J. Leng, I. Clester, A. Rodriguez, and F. Adib, "Robotic grasping of fully-occluded objects using rf perception," in *2021 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2021, pp. 923–929.
- [34] T. Boroushaki, L. Dodds, N. Naeem, and F. Adib, "Fusebot: Rf-visual mechanical search," *Robotics: Science and Systems 2022*, 2022.
- [35] T. Wang, X. Mao, C. Zhu, R. Xu, R. Lyu, P. Li, X. Chen, W. Zhang, K. Chen, T. Xue, X. Liu, C. Lu, D. Lin, and J. Pang, "Embodiedscan: A holistic multi-modal 3d perception suite towards embodied ai," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2024, pp. 19 757–19 767.
- [36] X. Han, S. Chen, Z. Fu, Z. Feng, L. Fan, D. An, C. Wang, L. Guo, W. Meng, X. Zhang *et al.*, "Multimodal fusion and vision-language models: A survey for robot vision," *arXiv preprint arXiv:2504.02477*, 2025.
- [37] Q. Xu, C. Jiang, Y. Han, B. Wang, and K. R. Liu, "Waveforming: An overview with beamforming," *IEEE Communications Surveys & Tutorials*, vol. 20, no. 1, pp. 132–149, 2017.
- [38] A. Hurst, A. Lerer, A. P. Goucher, A. Perelman, A. Ramesh, A. Clark, A. Ostrow, A. Welihinda, A. Hayes, A. Radford *et al.*, "Gpt-4o system card," *arXiv preprint arXiv:2410.21276*, 2024.
- [39] N. Ravi, V. Gabeur, Y.-T. Hu, R. Hu, C. Ryali, T. Ma, H. Khedr, R. Rädle, C. Rolland, L. Gustafson *et al.*, "Sam 2: Segment anything in images and videos," *arXiv preprint arXiv:2408.00714*, 2024.
- [40] S. Liu, Z. Zeng, T. Ren, F. Li, H. Zhang, J. Yang, Q. Jiang, C. Li, J. Yang, H. Su *et al.*, "Grounding dino: Marrying dino with grounded pre-training for open-set object detection," in *European conference on computer vision*. Springer, 2024, pp. 38–55.
- [41] S. Karamcheti, S. Nair, A. Balakrishna, P. Liang, T. Kollar, and D. Sadigh, "Prismatic vlms: Investigating the design space of visually-conditioned language models," in *Forty-first International Conference on Machine Learning*, 2024.
- [42] H. Liu, C. Li, Q. Wu, and Y. J. Lee, "Visual instruction tuning," *Advances in neural information processing systems*, vol. 36, pp. 34 892–34 916, 2023.
- [43] J. Chen, D. Zhu, X. Shen, X. Li, Z. Liu, P. Zhang, R. Krishnamoorthi, V. Chandra, Y. Xiong, and M. Elhoseiny, "Minigpt-v2: large language model as a unified interface for vision-language multi-task learning," *arXiv preprint arXiv:2310.09478*, 2023.
- [44] R. Cadene, S. Alibert, A. Soare, Q. Galloudec, A. Zouitine, S. Palma, P. Kooijmans, M. Aractingi, M. Shukor, D. Aubakirova, M. Russi, F. Capuano, C. Pascal, J. Choghari, J. Moss, and T. Wolf, "Lerobot: State-of-the-art machine learning for real-world robotics in pytorch," <https://github.com/huggingface/lerobot>, 2024.